

FORM PTO-1390
(REV. 5-93)

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

3981/OK014

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)**

09/980724

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/GB00/01855

17 May 2000

17 May 1999

TITLE OF INVENTION

WAVEGUIDE POLARISATION ROTATOR

APPLICANT(S) FOR DO/EO/US

Andrew Patrick BAIRD; Jamie STOKES

Applicant herewith submits to the United States Designated/Elected office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S. C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371 (f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S. C. 371 (b) and PCT Articles 22 and 39 (1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S. C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☐ A translation of the International Application into English (35 U.S. C. 371 (c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c) (3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 11. to 16. below concern other document(s) or information included:


11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98 (with 4 references).
12. ☐ An assignment document for recording. A **separate** cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment (WITH MARK-UP).
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney an/or address letter.
16. ☒ Other items or information: Affirmation of Priority Claim

EXPRESS MAIL CERTIFICATE

Date 11/15/01 Label No. EL 767719875 - us
 I hereby certify that, on the date indicated above, this paper or fee was deposited with the U.S. Postal Service & that it was addressed for delivery to the Assistant Commissioner for Patents, Washington, DC 20231 by "Express Mail Post Office to Addressee" service.

B.W. LEE
 Name (Print)

B.W. Lee
 Signature

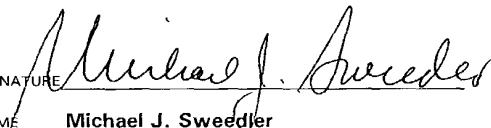U.S. APPLICATION NO. (if known sec 37 C.F.R.1.50) 097/980724		INTERNATIONAL APPLICATION NO.: PCT/GB00/01855		Attorney's Docket Number					
17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492 (a)(1)-(5)): Search Report has been prepared by the EPO <input checked="" type="checkbox"/> or JPO <input type="checkbox"/> \$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$710.00 No international preliminary examination fee paid to USPTO (37 CFR 4.482) but international search fee paid to USPTO (37 CFR 1.445 (a) (2))... \$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... \$1,040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).... \$100.00				ALCULATIONS	PTO USE ONLY				
				ENTER APPROPRIATE BASIC FEE AMOUNT =		\$890.00			
				Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
				Claims	Number Filed	Number Extra	Rate		
				Total Claims	11-20		X \$18.00	\$00	
Independent Claims	3-3		X \$84.00	\$00					
Multiple dependent claims(s) (if applicable) + 280				\$					
TOTAL OF ABOVE CALCULATIONS =				\$890.00					
Reduction by 1/2 for filing by small entity, if applicable.				\$.00					
SUBTOTAL =				\$890.00					
Processing fee of \$130.00 for furnishing the English translation later the <input type="checkbox"/> 20 <input type="checkbox"/> 39 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$					
TOTAL NATIONAL FEE =				\$890.00					
Fee for recording the enclosed assignment (37 CFR 1.21(h)). the assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$0.00					
TOTAL FEES ENCLOSED =				\$890.00					
				Amount to be refunded	\$				
				charged	\$				
a. <input checked="" type="checkbox"/> A check in the amount of \$890.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No.04-0100 in the amount of \$ to cover the above fees. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 04-0100. A duplicate copy of this sheet is enclosed.									
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.									
SEND ALL CORRESPONDENCE TO Michael J. Sweedler, Esq. Darby & Darby P C 805 Third Avenue New York, New York 10022-7513									
SIGNATURE  NAME Michael J. Sweedler REGISTRATION NO. 19,937									

09/98072402

JG13 Rec'd PCT/PTO 15 NOV 2001

EXPRESS MAIL CERTIFICATE

Date 11/15/01 Label No. EC767719875-US

I hereby certify that, on the date indicated above, I deposited this paper or fee with the U.S. Postal Service and that it was addressed for delivery to the Commissioner of Patents & Trademarks, Washington, DC 20231 by "Express Mail Post Office to Addressee" service.

B.W. LEE B.W. Lee
Name (Print) Signature

File No.: 3981/OK014US0

DARBY & DARBY P.C.

805 Third Avenue
New York, NY 10022
212-527-7700

Date: November 15, 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of: Andrew Patrick BAIRD and Jamie STOKES

Serial No: To be assigned
(U.S. National Phase of
International Application No. PCT/GB00/01855
Filed: May 17, 2000)

Filed: Concurrently herewith

For: WAVEGUIDE POLARISATION ROTATOR

PRELIMINARY AMENDMENT

Hon. Commissioner of
Patents and Trademarks
Box PCT
Washington, DC 20231
Attn: DO/EO/US

Sir:

Prior to examination, please amend the above-identified application

as follows:

Hon. Commissioner of
Patents and Trademarks
November 14, 2001
Page 2

IN THE CLAIMS:

Amend claim 3-8 to read as follows:

3. A waveguide rotator as claimed in claim 1 wherein the waveguide cross-section is substantially square.
4. A waveguide rotator as claimed in claim 1 wherein the waveguide cross-section is rectangular or circular.
5. A waveguide rotator as claimed in claim 1 wherein the wedge-shaped protrusion extends substantially across the width of the waveguide and narrows to a common location on the waveguide wall to provide a substantially planar surface between the waveguide wall and the rear waveguide reflecting wall.
6. A waveguide as claimed in claim 1 wherein the waveguide wedge-shaped protrusion has cut-outs so that it does not extend completely across the width of the waveguide at the rear reflecting wall.
7. A waveguide rotator as claimed in claim 1 wherein the wedge is stepped, the wedge being formed by a series of triangular protrusions of increasing waveguide width.


8. A waveguide rotator as claimed in claim 1 wherein the waveguide rotator is provided by dual wedge-shaped protrusions on opposed sides of the waveguide.

REMARKS

The foregoing amendments to the claims have been made for the purpose of eliminating multiple claim dependencies only. No new matter has been added to the application.

Entry of this amendment and a prompt official action on the merits of the claims as amended is respectfully requested.

Respectfully submitted,

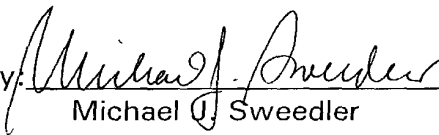By: 
Michael J. Sweedler
Attorney for Applicants
Reg. No. 19,937

DARBY & DARBY P.C.
805 Third Avenue
New York, New York 10022
212-527-7700

09/980724

JC13 Rec'd PCT/PTO 15 NOV 2001

EXPRESS MAIL CERTIFICATE

Date 11/15/01 Label No. EL 767719875-45

I hereby certify that, on the date indicated above, I deposited this paper or fee with the U.S. Postal Service and that it was addressed for delivery to the Commissioner of Patents & Trademarks, Washington, DC 20231 by "Express Mail Post Office to Addressee" service

B.W. LEE B.W. Lee
Name (Print) Signature

File No.: 3981/OK014USO

DARBY & DARBY P.C.

805 Third Avenue
New York, NY 10022
212-527-7700

Date: November 15, 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Application of: Andrew Patrick BAIRD and Jamie STOKES

Serial No: To be assigned
(U.S. National Phase of
International Application No. PCT/GB00/01855
Filed: May 17, 2000)

Filed: Concurrently herewith

For: WAVEGUIDE POLARISATION ROTATOR

MARK-UP TO ACCOMPANY PRELIMINARY AMENDMENT

Hon. Commissioner of
Patents and Trademarks
Box PCT
Washington, DC 20231
Attn: DO/EO/US

Sir:

Prior to examination, please amend the above-identified application
as follows:

Hon. Commissioner of
Patents and Trademarks
November 14, 2001
Page 2

IN THE CLAIMS:

Amend claim 3-8 to read as follows:

3. A waveguide rotator as claimed in claim 1 [or 2] wherein the waveguide cross-section is substantially square.
4. A waveguide rotator as claimed in claim 1 [or 2] wherein the waveguide cross-section is rectangular or circular.
5. A waveguide rotator as claimed in [any preceding] claim 1 wherein the wedge-shaped protrusion extends substantially across the width of the waveguide and narrows to a common location on the waveguide wall to provide a substantially planar surface between the waveguide wall and the rear waveguide reflecting wall.
6. A waveguide as claimed in [any one of claims 1-4] claim 1 wherein the waveguide wedge-shaped protrusion has cut-outs so that it does not extend completely across the width of the waveguide at the rear reflecting wall.
7. A waveguide rotator as claimed in [any one of claims 1 to 4] claim 1 wherein the wedge is stepped, the wedge being formed by a series of triangular protrusions of increasing waveguide width.

8. A waveguide rotator as claimed in [any one of claims 1 to 4] claim 1 wherein the waveguide rotator is provided by dual wedge-shaped protrusions on opposed sides of the waveguide.

WAVEGUIDE POLARISATION ROTATOR

The present invention relates to a system and to an apparatus and method for rotating a polarised signal in a waveguide. The present invention is particularly, but not exclusively, suited for use with a dual polarisation waveguide probe system in a low-noise block (LNB) for use with a satellite dish receiving signals broadcast by a satellite which includes two signals orthogonally polarised in the same frequency band.

In applicant's co-pending published International Application WO 92/22938 there is disclosed a dual polarisation waveguide probe system in which a waveguide is incorporated into a low-noise block receiver in which two probes are located for receiving linearly polarised energy of both orthogonal senses. The probes are located in the same longitudinal plane and on opposite sides of a single cylindrical bar reflector which reflects one sense of polarisation and passes the orthogonal signal with minimal insertion loss and then reflects the rotated orthogonal signal. The probes are spaced $\lambda/4$ from the reflector. A reflection rotator is also formed at one end of the waveguide using a thin plate which is oriented at 45° to the incident linear polarisation with a short circuit spaced approximately a quarter of a wavelength ($\lambda/4$) behind the leading edge of the plate. This plate splits the incident energy into equal components in orthogonal planes, one component being reflected by the leading edge and the other component being reflected by the waveguide short circuit. The resultant 180° phase shift between the reflected components causes a 90° rotation in the plane of linear polarisation upon recombination so that the waveguide output signals are located in the same longitudinal plane. Furthermore, in applicant's co-pending International Patent Application PCT/GB96/00332, an improved dual polarisation waveguide probe system is

-2-

disclosed for use with a wider frequency range transmitted by new satellite systems. In this improved probe system, a reflective twist plate was provided within the probe housing, the reflective twist plate having at least two signal reflecting edges so that at least two separate signals reflections are created. The multiple signal reflections enable the probe system to operate over a wider frequency range with minimal deterioration and signal output.

Applicant's co-pending International Published Application PCT/GB97/02428 disclosed a further improved waveguide which is able to operate across the entire frequency band of a satellite system with substantially the same performance. In this system the waveguide included a rotator which incorporated a reflecting plate in combination with a differential phase shift portion in the form of a waveguide of slightly asymmetrical cross-section so that orthogonally polarised signals that travel through the portion have different cut-off wavelengths. This results in a signal rotator which achieves 180° phase shift between two orthogonal components across the frequency range of signals received by the waveguide. The reflecting plate and the differential phase portion have inverse phase change with frequency characteristics so that the combined phase shift characteristic of the rotator shows a flatter response across the desired frequency range.

Although these systems generally work well, they suffer from a number of disadvantages. Firstly, a waveguide which incorporates an edge reflecting plate can incur inconsistencies over a large number of repeated castings and as the leading edge of the plate becomes thinner, it is more likely that the reflecting edge will be damaged in casting and the materials which can be suitably cast to provide such leading edges becomes limited. Furthermore, these systems are generally used with circular waveguides and it is desirable to provide

-3-

an improved waveguide rotation system which can be used with other waveguide shapes such as square or rectangular which still provides suitable rotation performance. Furthermore, with such existing waveguides the overall dimensions of the waveguide housing are often determined by the waveguide. Furthermore, the use of solely circular waveguides can limit the design options for the circuit board housing and a smaller housing can be afforded by the use of a square waveguide.

An object of the present invention is to provide an improved waveguide structure and waveguide which obviates or mitigates at least one of the aforementioned disadvantages.

This is achieved by providing a waveguide with an internal structure which protrudes into the waveguide such that a first orthogonal component of the incident polarised signal propagates to the end of the waveguide and is reflected therefrom and the second orthogonally polarised component is cut-off by the protruding structure which narrows the waveguide, at a distance from a short circuit at the end of the waveguide, and is reflected substantially at the cut-off point, the cut-off point being frequency dependent. At some predetermined distance from the reflecting means and the cut-off point, the first component and the second component are recombined such that the polarisation of the recombined structure is rotated 90° from the incident polarisation. The protruding interior surface of the waveguide which narrows the waveguide creates a pocket or cavity behind the waveguide into which components from a circuit board can be inserted, for example voltage regulators. In addition, the protruding surface is generally planar such that the waveguide can be more easily cast than a thin plate; and can therefore be manufactured with a greater variety of materials.

According to a first aspect of the present invention, there is provided a waveguide rotator for use

-4-

with a dual polarisation waveguide probe system for receiving at least two signals which are orthogonally polarised, said system having a waveguide into which at least two orthogonally polarised signals are received for transmission therealong, said waveguide having:

a first probe extending from a wall of the waveguide into the interior of the waveguide, said first probe being adapted to receive a first polarised signal travelling in the same longitudinal plane thereof,

signal isolation means extending from the wall of the waveguide and said isolating means being located downstream of said first probe lying in said longitudinal plane for reflecting the first polarised signal in said longitudinal plane back to said probe means and allowing a second polarised signal, orthogonal to said first polarised signal to pass along said waveguide,

second probe means located downstream of said signal isolating means and extending from the wall of the waveguide in said longitudinal plane,

signal rotator means disposed in said waveguide downstream of said second probe means and having a protruding surface extending from an interior surface of said waveguide partly across said waveguide towards a short circuit disposed at an end of said waveguide, said signal rotator means being dimensioned and proportioned such that an incident polarisation component of said second polarisation signal propagates to the short circuit at the end of the waveguide and is reflected therefrom and a second incident polarisation component is cut-off by said protruding surface and before reaching the short circuit and is reflected substantially by said protruding surface at a frequency dependent cut-off point whereby said reflected first and second components recombine within said waveguide such that the polarisation of the reflected signal is rotated by 90° from the incident polarisation such that the reflected polarised signal is in said longitudinal plane for

detection by said second probe means.

In a preferred arrangement a suitably sized wedge-shaped protrusion is located into the short circuit end of the waveguide for rotating a polarised signal 90° , that is vertical to horizontal polarity or vice-versa. This rotation is achieved by introducing a phase shift between the two components of the incident signal.

A forward travelling (incident) horizontally polarised signal is separable into two components, E1 and E2. The wavelength of E1 and E2 is determined by the width of the waveguide perpendicular to the component. As the signal propagates along the wedge part of the waveguide, the wavelength of the E2 component remains unaffected because the width of the guide perpendicular to E2 remains constant. Conversely, the wavelength of the E1 component increases as it propagates along the wedge due to the decreasing waveguide width. The result of this is to change the phase of E2 relative to E1, that is E2 leads E1 in phase, and this effect is doubled when the signal is reflected back along the waveguide. When the wedge is correctly proportioned and dimensioned E2 leads E1 by 180° when the signal starts to propagate back along the waveguide beyond the wedge-shaped protrusion. Recombining the E1 and E2 components results in converting the horizontally polarised signal EV to vertical polarisation EH. The wedge-rotator can be optimised to provide a reasonably flat 180° phase shift over the required operating frequency range providing 90° rotation of the incident linearly polarised signal.

30 Preferably, the waveguide cross-section is substantially square. Alternatively, the waveguide cross-section may be rectangular or circular or any other suitable waveguide cross-section.

35 Preferably also, the wedge-shaped protrusion extends substantially across the width of the waveguide and narrows to a common location on the waveguide wall to provide a substantially planar surface between the

-6-

waveguide wall and the rear waveguide reflecting wall.

Alternatively, the waveguide wedge-shaped protrusion may have cut-outs so that it does not extend completely across the width of the waveguide at the rear reflecting wall.

Alternatively, the wedge may be stepped, the wedge being formed by a series of triangular protrusions of increasing waveguide width. It will be appreciated that increasing the number of protrusions or steps approximates the stepped wedge rotator to a smooth surface wedge rotator.

In a further alternative arrangement dual wedge-shaped protrusions may be used on opposed sides of the waveguide. In yet a further embodiment of the invention, one or both dual wedges may be stepped.

In accordance with another aspect of the present invention, there is provided a method of rotating a polarised signal travelling in a waveguide having a short circuit at one end by substantially 90°, said method comprising the steps of,

providing a protrusion in a waveguide, said protrusion extending partially across said waveguide cavity,

allowing a first component of said polarised signal to travel to the short circuit at the end of said waveguide and be reflected from said end back along the waveguide,

increasing the wavelength of a second component of said polarised signal by decreasing the width of said waveguide by said protrusion,

reflecting said second component from the protrusion at a frequency dependent cut-off point before said second component reaches said short circuit,

recombining the reflected first and second components in said waveguide whereby said recombined polarised signal is rotated substantially 90° from the polarisation of the incident signal.

-7-

In accordance with a further aspect of the invention, there is provided a low-noise block (LNB) for use with a satellite dish receiving signals broadcast by a satellite which includes two signals orthogonally polarised in the same frequency band, said LNB comprising:

a feedhorn,

a waveguide coupled to said feedhorn, said waveguide having a printed circuit board support surface and a short circuit end plate,

a printed circuit board mounted on said support surface and having first and second probes extending into said waveguide, said probes being disposed in the same longitudinal plane,

a second rotator structure disposed within said waveguide between said second probe and said short circuit end plate, said signal rotator structure narrowing the waveguide to a component of a polarised signal to increase the wavelength of the component and reflect the component at a frequency dependent cut-off point before it reaches the short circuit, and permitting an orthogonal component of said polarised signal to be reflected by said short circuit, the reflected components being recombined within said waveguide before reaching said second probe whereby the recombined polarised signal rotates 90° from the polarisation of the incident signal into the same longitudinal plane as said probes.

These and other aspects of the present invention will become apparent from the following description when taken in combination with the accompanying drawings in which:

Fig. 1 is a partly broken-away view of a low-noise block receiver with a generally square waveguide including a wedge rotator in accordance with a preferred embodiment of the present invention;

Fig. 2 is a sectional view taken on the line 2-2 of

-8-

Fig. 1 depicting the horizontally polarised signal and components E1 and E2;

Fig. 3 is a similar view to Fig 2 but depicting the vertically polarised signal formed by components E1 and E2 after reflection from the rear of the waveguide and the wedge rotator;

Fig. 4 depicts a side view through the waveguide showing the profile of the wedge rotator taken on the line 4-4;

Figs. 5a, 5b and 5c depict cross-sectional views through the wedge rotator taken on the lines 5A, 5B and 5C of Fig. 4 and showing the increasing effective cross-section of the wedge rotator within the waveguide housing;

Fig. 6 is a graph of phase vs. frequency for the wedge plate rotator shown in Figs. 1 to 5;

Fig. 7 is a graph of single conversion (insertion loss/return loss) vs. frequency for the wedge rotator waveguide structure shown in Figs. 1 to 5;

Fig. 8 depicts a diagrammatic view of an alternative embodiment of the invention in which the wedge rotator is stepped being formed of triangular sections which extend across the waveguide by different amounts;

Fig. 9 depicts a side view of Fig. 8 taken through the waveguide;

Fig. 10 depicts a graph of phase vs. frequency for the stepped wedge rotator waveguide and shows, for comparative purposes, the response from the cut-off method and the phase shift method;

Fig. 11 depicts a graph of signal conversion (insertion loss/return loss) vs. frequency for the stepped wedge rotator with the corresponding responses for the cut-off method, and for phase shift method being shown separately for comparative purposes;

Fig. 12 depicts a partly perspective view of a circular waveguide with a wedge rotator disposed therein;

Fig. 13a, b and c are cross-sectional views through

-9-

the waveguide and wedge rotator shown in Fig. 12;

Fig. 14 depicts a further alternative embodiment of the present invention in which a square waveguide has dual wedge rotators inserted therein;

5 Figs. 15a, b and c are respective cross-sectional views taken on the lines A, B and C in Fig. 14 showing the increasing cross-section of the wedges as the rotators approach the end plate;

10 Fig. 16 shows a further embodiment of the present invention in which a wedge rotator is provided in a substantially square waveguide where the wedge does not extend the entire width of the waveguide at the reflecting end due to wedge cut-outs;

15 Fig. 17 shows a graph of phase vs. frequency for the wedge with cut-outs and for the wedge shown in Fig. 1 response also depicted for comparative purposes, and

20 Fig. 18 is a graph of single conversion (insertion loss/return loss) vs. frequency for the wedge rotator with cut-outs with normal wedge response also shown for comparative purposes.

25 Fig. 19 is a graph of signal conversion (insertion loss/return loss) vs. frequency comparing the response of a wedge rotator in a square waveguide with a 45° twist plate, as in the prior art, in a square waveguide.

30 Reference is made to Fig. 1 of the drawings which depicts a low-noise block receiver, generally indicated by reference numeral 10, which is adapted to be mounted to a satellite receiving dish via a boom arm (not shown in the interests of clarity) in a way which is well known in the art. As is also well known, the low-noise block receiver 10 is arranged to receive high frequency vertically and horizontally orthogonally polarised radiation signals from the satellite dish and to process these signals to provide an output which is fed to a cable 12 which is, in turn, connected to a satellite receiver decoder unit (not shown) for subsequent processing. The low-noise block receiver 10 includes a

35

-10-

cast metal waveguide 14 which is shown partly broken away to depict the interior shape of the waveguide and interior waveguide components. The waveguide is generally square in cross-section. The waveguide has a front aperture 16 for facing a satellite dish for receiving electro-magnetic radiation from an integral circular corrugated feedhorn 18 (shown in broken outline) which is located at the front of the waveguide 14. Integrally cast with the waveguide 14 and feedhorn 18 is a top surface plate 20 for receiving a printed circuit board 22 containing electronic components for receiving signals from the waveguide 14 and for processing these signals prior to transferring the signals to cable 12. The waveguide and internal components are similar to those disclosed in applicant's co-pending International Patent Applications WO 92/22938 and WO 98/10479. Accordingly, disposed in the waveguide in the same longitudinal plane is a first probe 24, a reflective post 26 and a second probe 28. In this embodiment, the reflective post 26 extends across the entire width of the interior of the waveguide. The outputs of the probes 24 and 28 pass through the waveguide wall 30 in the same longitudinal plane, generally indicated by reference numeral 31. The probes extend through cast plate 20 to the integrated circuit board 22. The distance between probes 24, 28 and the reflective post 26 is nominally $\lambda/4$ where λ is the wavelength of the signals in the waveguide. At the downstream end of the waveguide 14 which is furthest from the aperture 16, there is disposed a short circuit end plate 32 which, as best seen in Fig. 4 of the drawings, is disposed perpendicular to the longitudinal axis of the waveguide 14. The end plate 32 acts as a short circuit reflecting plate, as is described in detail in WO 92/22938 and WO 98/10479, for signals travelling along the waveguide.

Reference is now made to Figs. 2 and 3 of the drawings which are sectional views through the waveguide

-11-

14 towards the short circuit 32. It will be seen from Figs. 2 and 3 that the waveguide is not exactly square. The lower corners of the waveguide 14a are in fact rounded or bevelled to provide a suitable exterior shape for the waveguide 14 receiving a cover 34, shown in broken outline, for enclosing the waveguide 14 and circuitry 22. Also shown in the waveguide 14 is a wedge-shaped protrusion, generally indicated by reference numeral 36, which extends from the interior wall 29 of the waveguide to the short circuit end 32 at which it extends diagonally across the end of the waveguide.

The wedge-shaped protrusion rotates a polarised signal 90° on reflection, i.e. vertical to horizontal polarity or vice-versa, by introducing a phase shift between the horizontal and vertical orthogonal components of the incident signal as will be described. This is best seen from Figs. 2 and 3 of the drawings. Firstly, with reference to Fig. 2, an incident, forward travelling (into the paper) horizontally polarised signal EH, can be separated into two components E1 and E2. The wavelength of E1 and E2 is determined by the width of the waveguide perpendicular to the component. As the signal propagates along the wedge 36, the wavelength of the E2 component remains unaffected because the width of the waveguide 14 perpendicular to component E2 remains constant. On the contrary, the wavelength of the E1 component increases as it propagates along the wedge 36 due to the decreasing width of the waveguide as the waveguide narrows due to the increasing wedge, as best seen in Fig. 4 of the drawings. The effect of this is to change the phase of the E2 component relative to E1; that is, E2 leads E1 in phase. This effect is doubled as the signal is reflected back along the waveguide (out of the paper). If the wedge 36 is correctly dimensioned and proportioned E2 will lead E1 by 180° by the time the signal is propagating back along the waveguide at position 38, as shown in Figs. 1 and 4. Recombining

-12-

components E1 and E2 results in converting the horizontal polarisation signal EH to a vertical polarisation signal EV, as best seen in Figs. 2 and 3 of the drawings.

Thus, the signal which has travelled past the probe 28
5 has been rotated by 90° such that it can be detected by probe 28 in the same way as the probe detected reflected signals in applicant's co-pending applications WO 92/22938 and WO 98/10479.

Reference is also made to Figs. 4 and 5 of the
10 drawings where the side view of Fig. 4 depicts the profile of the wedge 36 within the waveguide and shows that the wall 40 of the wedge increasingly projects into the waveguide 14 as it approaches the short circuit end 32. The cross-sectional views in Figs. 5a, b and c show
15 the increasing cross-section of waveguide taken up by the wedge rotator towards the short circuit end. The wall 38 of the wedge rotator defines a cavity 42 behind the wall into which a pocket 43 for electronic components of the printed circuit board 22 may be disposed to
20 facilitate manufacture and overall compactness of the LNB.

Reference is now made to Figs. 6 and 7 of the drawings. Fig. 6 depicts a graph of phase vs. frequency and shows that the phase shift created by the
25 polarisation wedge rotator is substantially 180° across the frequency range of interest for such low-noise blocks which is 10.7 to 12.75 GHz for the Astra satellite. Fig. 7 shows the insertion loss (S12)/return loss (S11) in decibels (dB) over the frequency range which shows that
30 there is minimal insertion loss (S12)/return loss (S11) over the desired frequency range.

Reference is now made to Fig. 8 of the drawings which depicts a diagrammatic view of an alternative embodiment of the invention in which like numerals refer
35 to like parts and in which the wedge rotator is formed of triangular sections 46, 48 which extend across the waveguide by different amounts. In this embodiment two

-13-

triangular sections are shown to provide a stepped wedge rotator. A side view of the stepped wedge rotator is shown in Fig. 9. The larger triangular section wedge, generally indicated by reference numeral 46, fills a larger proportion of the waveguide such that only a component perpendicular to the wedge portion 46 can propagate. The phase shift increases with increasing frequency as can be best seen from Fig. 10 of the drawings. The conversion of an incident signal horizontally polarised into a reflected vertically polarised signal is shown in Fig. 11 (S12) and the return loss is also shown (S11). Although this wedge alone can be optimised in the band centre at 11.75 GHz, it has relatively poor performance, on its own, at the band edges.

The smaller wedge 48 fills only a relatively small proportion of the waveguide 14 thus allowing components parallel to, and perpendicular to, the wedge portion 48 to propagate along the waveguide. It will be seen from Fig. 10 that the resultant phase shift between the components reduces with increasing frequency. The conversion of an incident horizontally polarised signal into a reflective vertically polarised signal is shown in Fig. 11 (S12) and the return loss is also shown (S11). The device can be optimised in the band centre at 11.75 GHz but, once again, poor performance is achieved at the band edges.

When the waveguide, as shown in Fig. 8, has combined cross-sections 46 and 48 to create a stepped wedge, a substantially flat phase vs. frequency characteristic is achieved as shown in Fig. 10 of the drawings. The signal conversion and insertion/return loss for this arrangement is also shown in Fig. 11 and it will be seen that the bandwidth is greatly enhanced over the desired Astra satellite frequency range.

It will be appreciated that various modifications may be made to the embodiments hereinbefore described,

-14-

without departing from the scope of the invention. For example, the waveguide may be circular in cross-section with a conical section used similar to that shown in Figs. 1 to 5 of the drawings. Fig. 12 shows a longitudinal section through a circular waveguide and Figs. 13a, b and c show respective cross-sections at locations a, b and c showing the increasing protrusion of the wedge into the waveguide as the wedge extends towards the end face 32 of the waveguide 14.

Fig. 14 depicts a side view of a further embodiment of a wedge rotation system in which the waveguide 14 has two wedge-shaped protrusions 50 and 52 extending from the waveguide wall 18 towards the end face 32 instead of a single wedge. Sectional views taken at locations a, b and c are depicted in Figs. 15a, b and c respectively and show the increasing protrusion of the wedges as they extend towards the end face 32 of the waveguide. This arrangement will operate in the same way the previously described embodiments.

A yet further embodiment is shown in Fig. 16 of the drawings where it can be seen that the wedge does not have to extend across the entire width of the waveguide at the end face. In this arrangement it will be seen that the wedge rotator 36 has cut-outs to define non-enclosed areas 54, 56 at the sides of the wedge. This arrangement does not materially affect the performance of the waveguide, as can be seen with reference to Figs. 17 and 18. In this case, Fig. 17 shows a graph of phase vs. frequency for both the normal wedge of Figs. 1 to 5 and the wedge with cut-outs and it will be seen that the performance is substantially identical over the frequency range of interest, i.e. 10.7 to 12.75 GHz, thereby providing a substantially flat phase shift of 180°. Similarly, the single conversion for the wedge with cut-outs is substantially identical to the normal wedge for both S12 and S11 over the frequency range of interest.

Reference is now made to Fig. 19 of the drawings

-15-

which shows the insertion loss (S12) and the return loss (S11), in decibels, for a wedge rotator (wedge plate) of the type shown in Fig. 1 and a twist plate in a square waveguide. The twist plate is oriented at 45° to the incident polarisation and operates like those disclosed in WO 92/22938 and WO 98/10479. It will be seen that the performance of the wedge plate is superior over the frequency range of interest, 10.7 to 12.75 GHz. For all embodiments it will be understood that the cut-off point is frequency dependent, with higher frequency signals being reflected at a cut-off point nearer to the short circuit, i.e. the higher the frequency to the signal, the closer to the short circuit is the cut-off point.

It will also be appreciated that further modifications may be made to the embodiments hereinbefore described without departing from the scope of the invention. For example, it will be appreciated that the waveguide may be made of any suitable shape and that the wedge insertion may not be exactly the same shape as that shown. The wedge insertion may be of any suitable shape as long as the wedge protrudes into the waveguide to provide a cut-off at a certain point along its length and signal reflection for recombination, with the signal reflected from the end of the waveguide, to give a suitable phase shift along the waveguide at a desired location. It will also be appreciated that this wedge rotator may have application to waveguides other than those for use with low-noise blocks. The principle of a wedge rotator in a waveguide is applicable to many shapes of waveguide and many applications. Furthermore, the waveguide/LNB may be cast or injection moulded in plastic with internal surfaces metallised by vapour or electroplated to create low-loss surfaces.

Advantages of the invention are that manufacturing of such waveguide rotators is facilitated because thin reflector plates do not require to be cast. This allows the use of additional casting materials to facilitate

-16-

flexibility in choice of materials. The provision of a wedge rotator allows a pocket or cavity to be created in the waveguide into which electronic components on a printed circuit board 22 can be inserted so that the overall dimensions of a waveguide and adjacent integrated circuit may be minimised. The wedge rotator provides improved performance over the desired frequency range in similar waveguides with a twist plate. In the application to a low-noise block (LNB) this facilitates the insertion of a voltage regulator into the cavity to minimise the onboard integrated circuit area and allow the entire assembly to be encompassed in a housing of minimal volume. This minimises manufacturing costs and storage and transport costs when very large numbers of such low-noise blocks and waveguides have to be made.

-17-

CLAIMS

1. A waveguide rotator for use with a dual polarisation waveguide probe system for receiving at least two signals which are orthogonally polarised, said system having a waveguide into which at least two orthogonally polarised signals are received for transmission therealong, said
5 waveguide having:

a first probe extending from a wall of the waveguide into the interior of the waveguide, said first probe being adapted to receive a first polarised signal travelling in the same longitudinal plane thereof,
10

signal isolation means extending from the wall of the waveguide and said isolating means being located downstream of said first probe lying in said longitudinal plane for reflecting the first polarised signal in said longitudinal plane back to said probe means and allowing
15 a second polarised signal, orthogonal to said first polarised signal to pass along said waveguide,

second probe means located downstream of said signal isolating means and extending from the wall of the waveguide in said longitudinal plane,
20

signal rotator means disposed in said waveguide downstream of said second probe means and having a protruding surface extending from an interior surface of said waveguide partly across said waveguide towards a short circuit disposed at an end of said waveguide, said
25 signal rotator means being dimensioned and proportioned such that an incident polarisation component of said second polarisation signal propagates to the short circuit at the end of the waveguide and is reflected therefrom and a second incident polarisation component is cut-off by said protruding surface and before reaching the short circuit, and is reflected substantially by said protruding surface at a frequency dependent cut-off point whereby said reflected first and second components
30 recombine within said waveguide such that the polarisation of the reflected signal is rotated by 90°
35

-18-

from the incident polarisation such that the reflected polarised signal is in said longitudinal plane for detection by said second probe means.

5 2. A waveguide rotator as claimed in claim 1 wherein a wedge-shaped protrusion is located into the short circuit end of the waveguide for rotating a polarised signal 90°, that is, vertical to horizontal polarity or vice-versa by introducing a phase shift between the two components of the incident signal.

10 3. A waveguide rotator as claimed in claim 1 or 2 wherein the waveguide cross-section is substantially square.

15 4. A waveguide rotator as claimed in claim 1 or 2 wherein the waveguide cross-section is rectangular or circular.

5. A waveguide rotator as claimed in any preceding claim wherein the wedge-shaped protrusion extends substantially across the width of the waveguide and narrows to a common location on the waveguide wall to provide a substantially planar surface between the waveguide wall and the rear waveguide reflecting wall.

20 6. A waveguide as claimed in any one of claims 1 to 4 wherein the waveguide wedge-shaped protrusion has cut-outs so that it does not extend completely across the width of the waveguide at the rear reflecting wall.

25 7. A waveguide rotator as claimed in any one of claims 1 to 4 wherein the wedge is stepped, the wedge being formed by a series of triangular protrusions of increasing waveguide width.

30 8. A waveguide rotator as claimed in any one of claims 1 to 4 wherein the waveguide rotator is provided by dual wedge-shaped protrusions on opposed sides of the waveguide.

35 9. A waveguide rotator as claimed in claim 8 wherein one or both dual wedges may be stepped.

10. A method of rotating a polarised signal travelling in a waveguide having a short circuit at one end by

- 19 -

substantially 90°, said method comprising the steps of,
providing a protrusion in a waveguide, said
protrusion extending partially across said waveguide
cavity,

allowing a first component of said polarised signal to travel to the short circuit at the end of said waveguide and be reflected from said end back along the waveguide,

increasing the wavelength of a second component of said polarised signal by decreasing the width of said waveguide by said protrusion,

reflecting said second component from the protrusion at a frequency dependent cut-off point before said second component reaches said short circuit,

recombining the reflected first and second components in said waveguide whereby said recombined polarised signal is rotated substantially 90° from the polarisation of the incident signal.

11. A low-noise block (LNB) for use with a satellite dish receiving signals broadcast by a satellite which includes two signals orthogonally polarised in the same frequency band, said LNB comprising:

a feedhorn,

a waveguide coupled to said feedhorn, said waveguide having a printed circuit board support surface and a short circuit end plate,

a printed circuit board mounted on said support surface and having first and second probes extending into said waveguide, said probes being disposed in the same longitudinal plane,

a second rotator structure disposed within said waveguide between said second probe and said short circuit end plate, said signal rotator structure narrowing the waveguide to a component of a polarised signal to increase the wavelength of the component and reflect the component at a frequency dependent cut-off point before it reaches the short circuit, and permitting

-20-


an orthogonal component of said polarised signal to be reflected by said short circuit, the reflected components, being recombined within said waveguide before reaching said second probe whereby the recombined polarised signal rotates 90° from the polarisation of the incident signal into the same longitudinal plane as said probes.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)
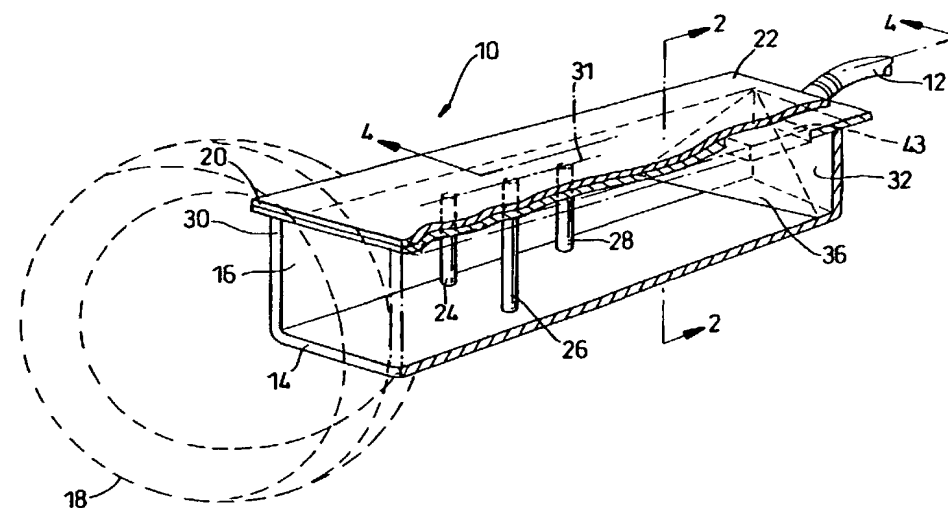
<p>(51) International Patent Classification ⁷ : H01P 1/161, 1/165</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/70704 (43) International Publication Date: 23 November 2000 (23.11.00)</p>
<p>(21) International Application Number: PCT/GB00/01855 (22) International Filing Date: 17 May 2000 (17.05.00) (30) Priority Data: 9911449.8 17 May 1999 (17.05.99) GB <i>17 Nov 01 (30m)</i> (71) Applicant (for all designated States except US): CAMBRIDGE INDUSTRIES LIMITED [GB/GB]; Cambridge House, 5 Commerce Park, Brunel Road, Theale, Berkshire RG7 4AB (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): STOKES, Jamie [GB/GB]; 166 Wantage Road, Reading, Berkshire RG30 2SJ (GB). (74) Agents: MCCALLUM, William, Potter et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).</p>		<p>(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.</p>
<p>(54) Title: WAVEGUIDE POLARISATION ROTATOR</p>  <p>(57) Abstract</p> <p>A waveguide rotator is described for use with an LNB for use with a dual polarisation waveguide probe system in which the waveguide has an internal structure which protrudes into the waveguide such that a first orthogonal component of the incident polarised signal propagates to the end of the waveguide and is reflected therefrom and the second orthogonally polarised component is cut-off by the protruding structure which narrows the waveguide, at a distance from a short circuit at the end of the waveguide, and is reflected substantially at the cut-off point. At some predetermined distance from the reflecting means and the cut-off point, the first component and the second component are recombined such that the polarisation of the recombined structure is rotated 90° from the incident polarisation.</p>		

1/11

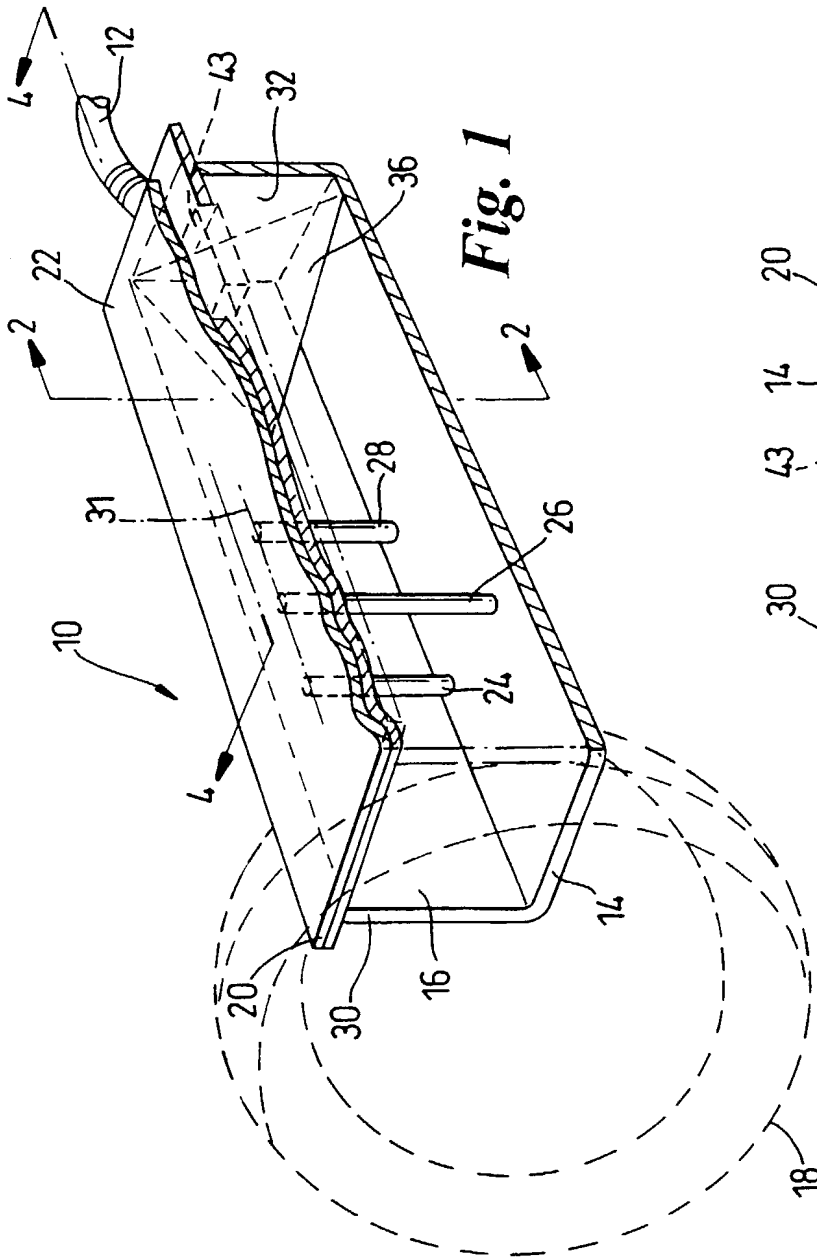


Fig. 1

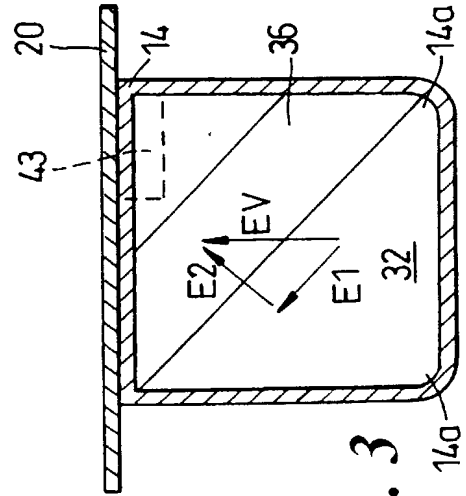


Fig. 3

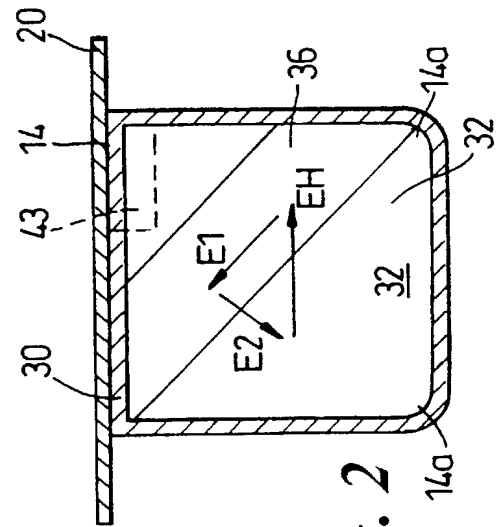


Fig. 2

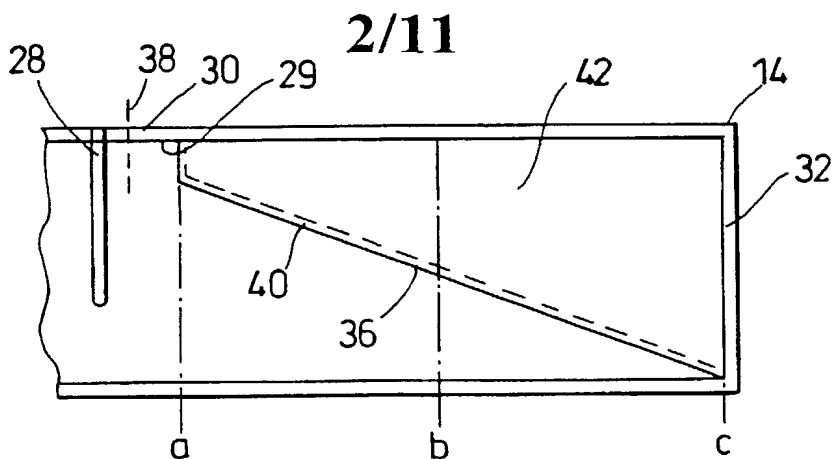


Fig. 4

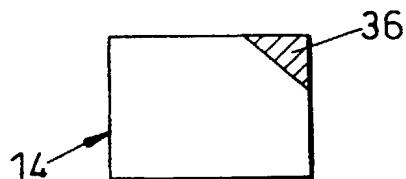


Fig. 5a

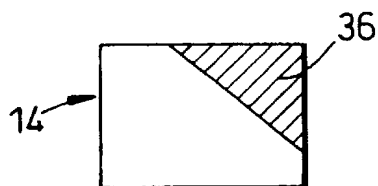


Fig. 5b

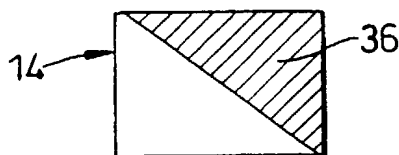


Fig. 5c

3/11

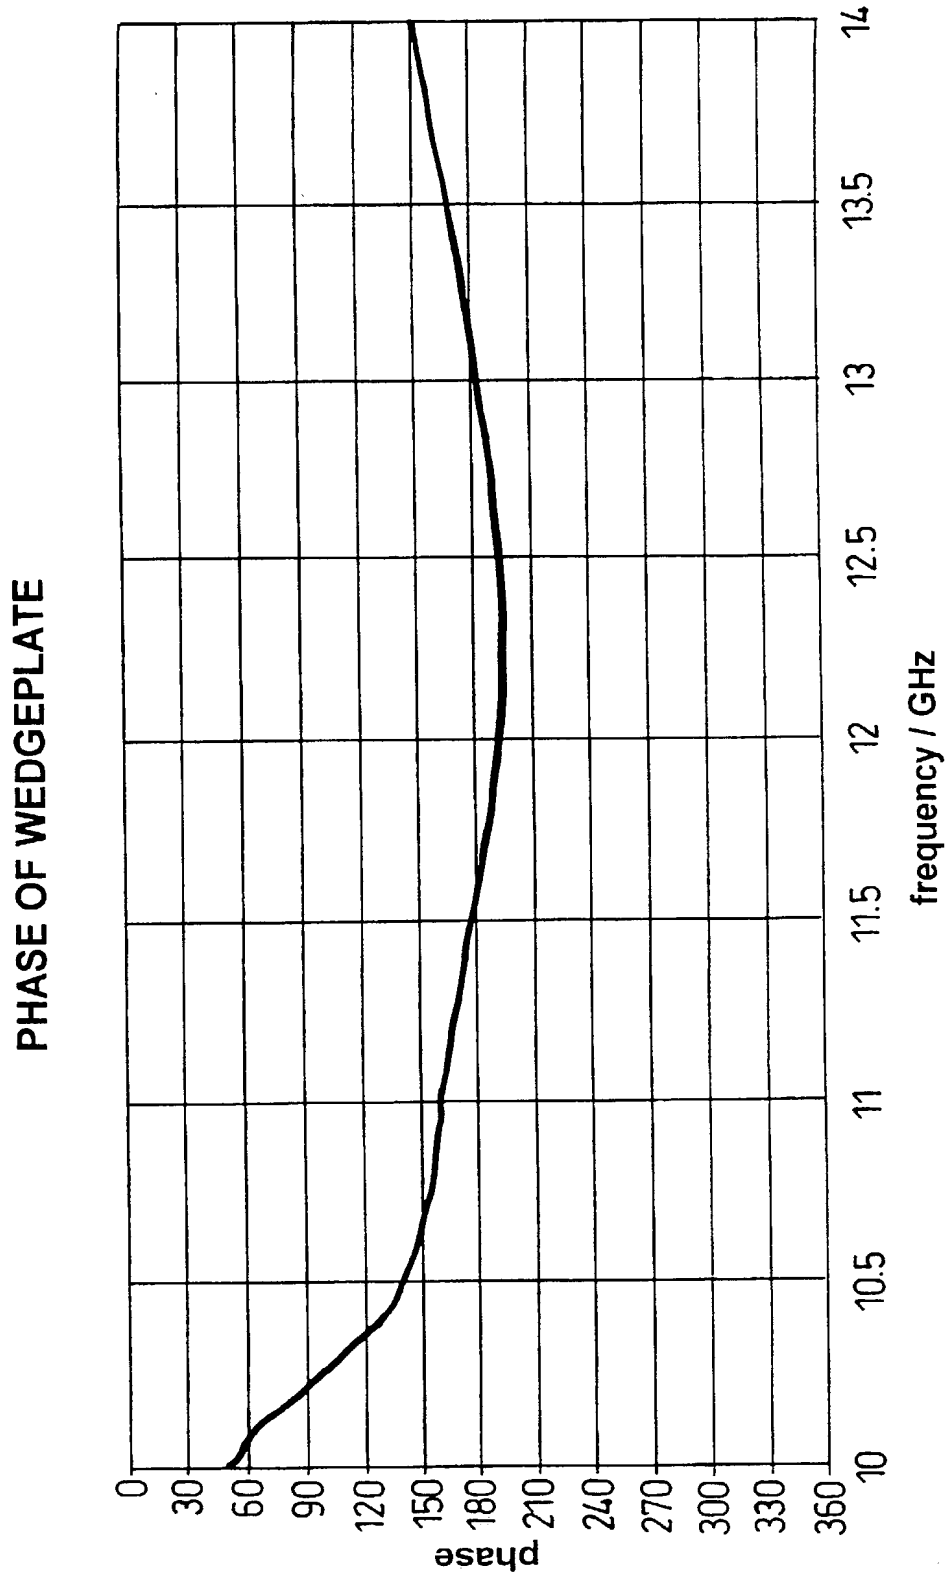


Fig. 6

4/11

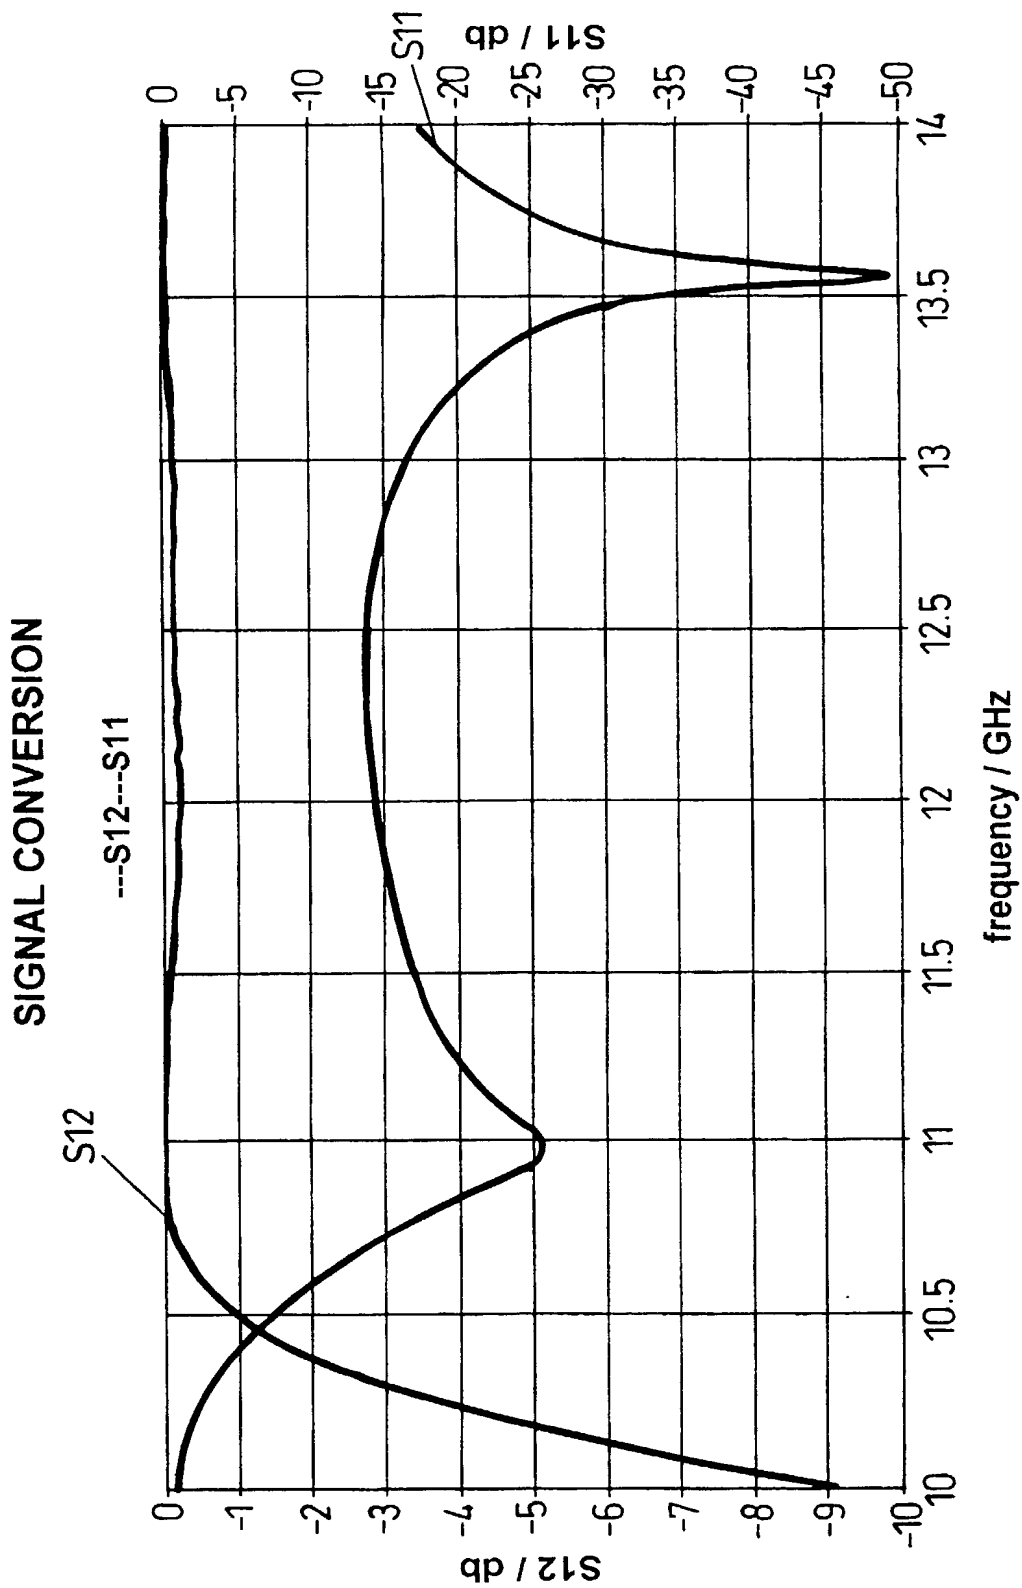


Fig. 7

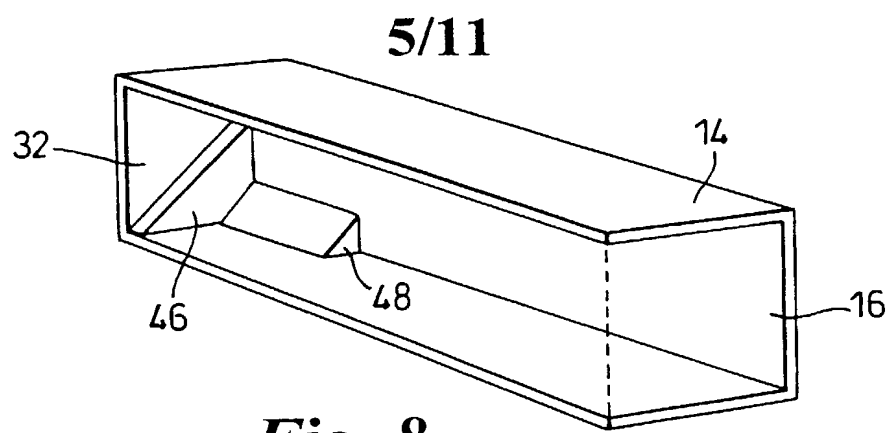


Fig. 8

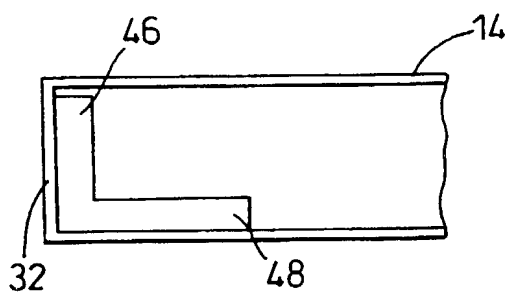


Fig. 9




Fig. 13a

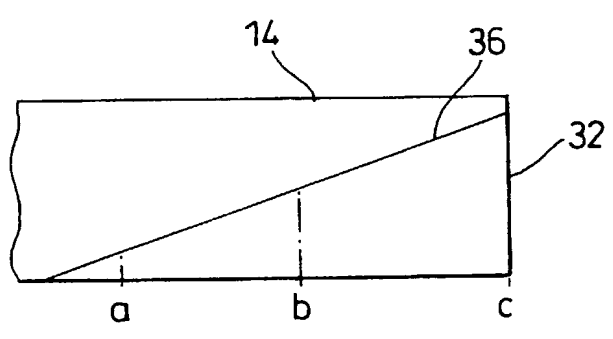


Fig. 12




Fig. 13b




Fig. 13c

6/11

PHASE OF STEPPED WEDGE

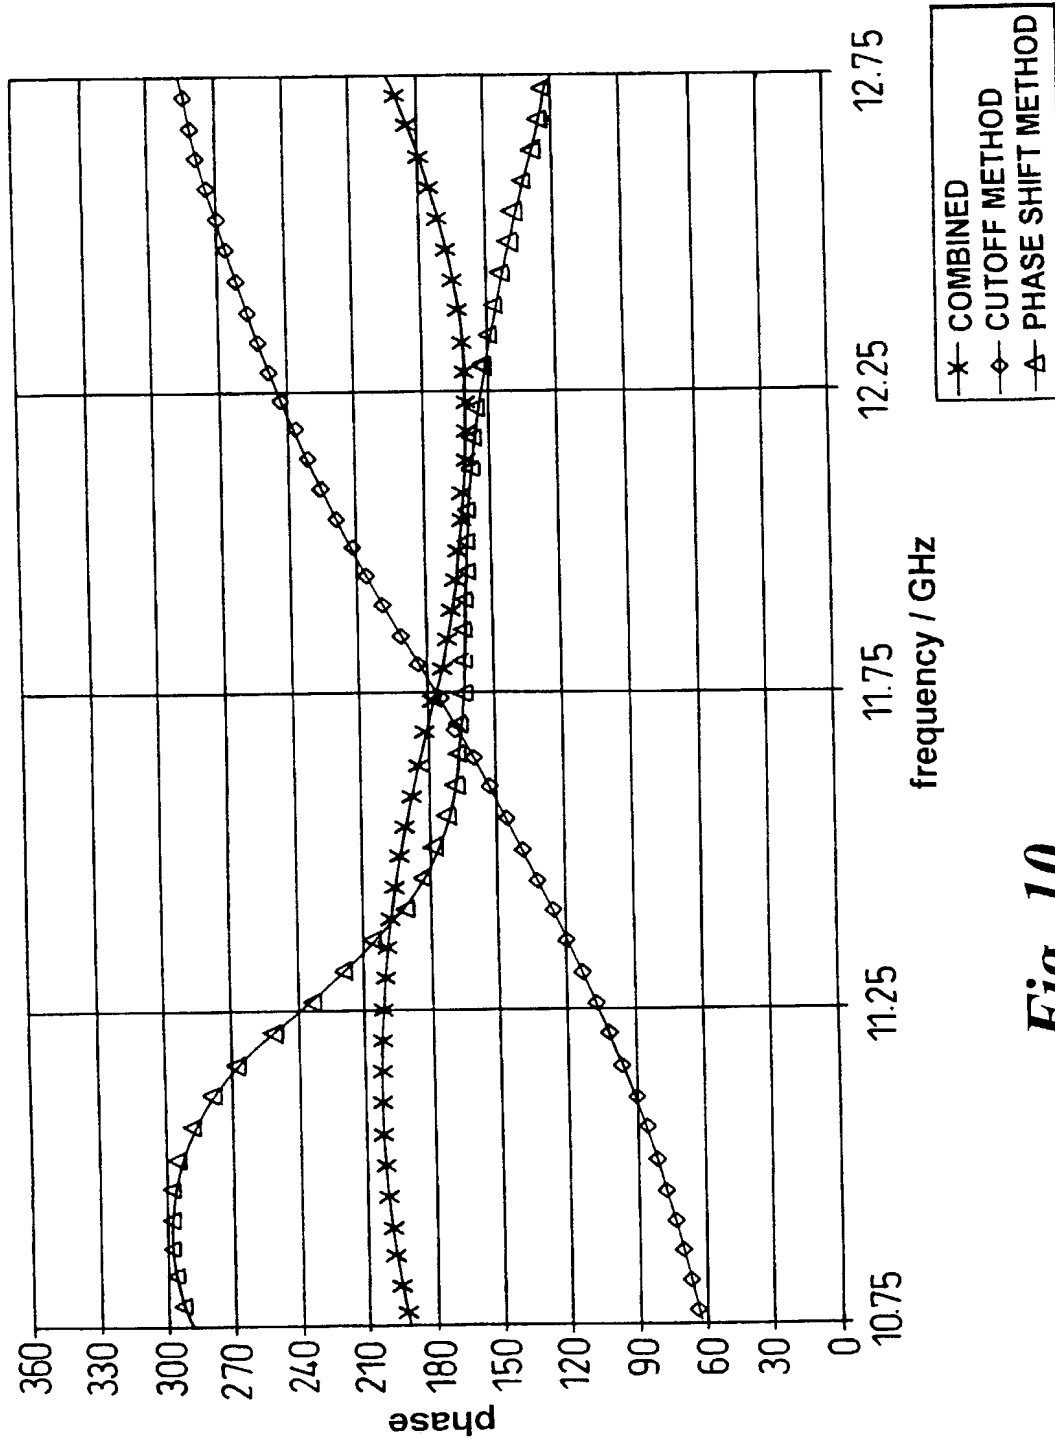


Fig. 10

7/11

SIGNAL CONVERSION

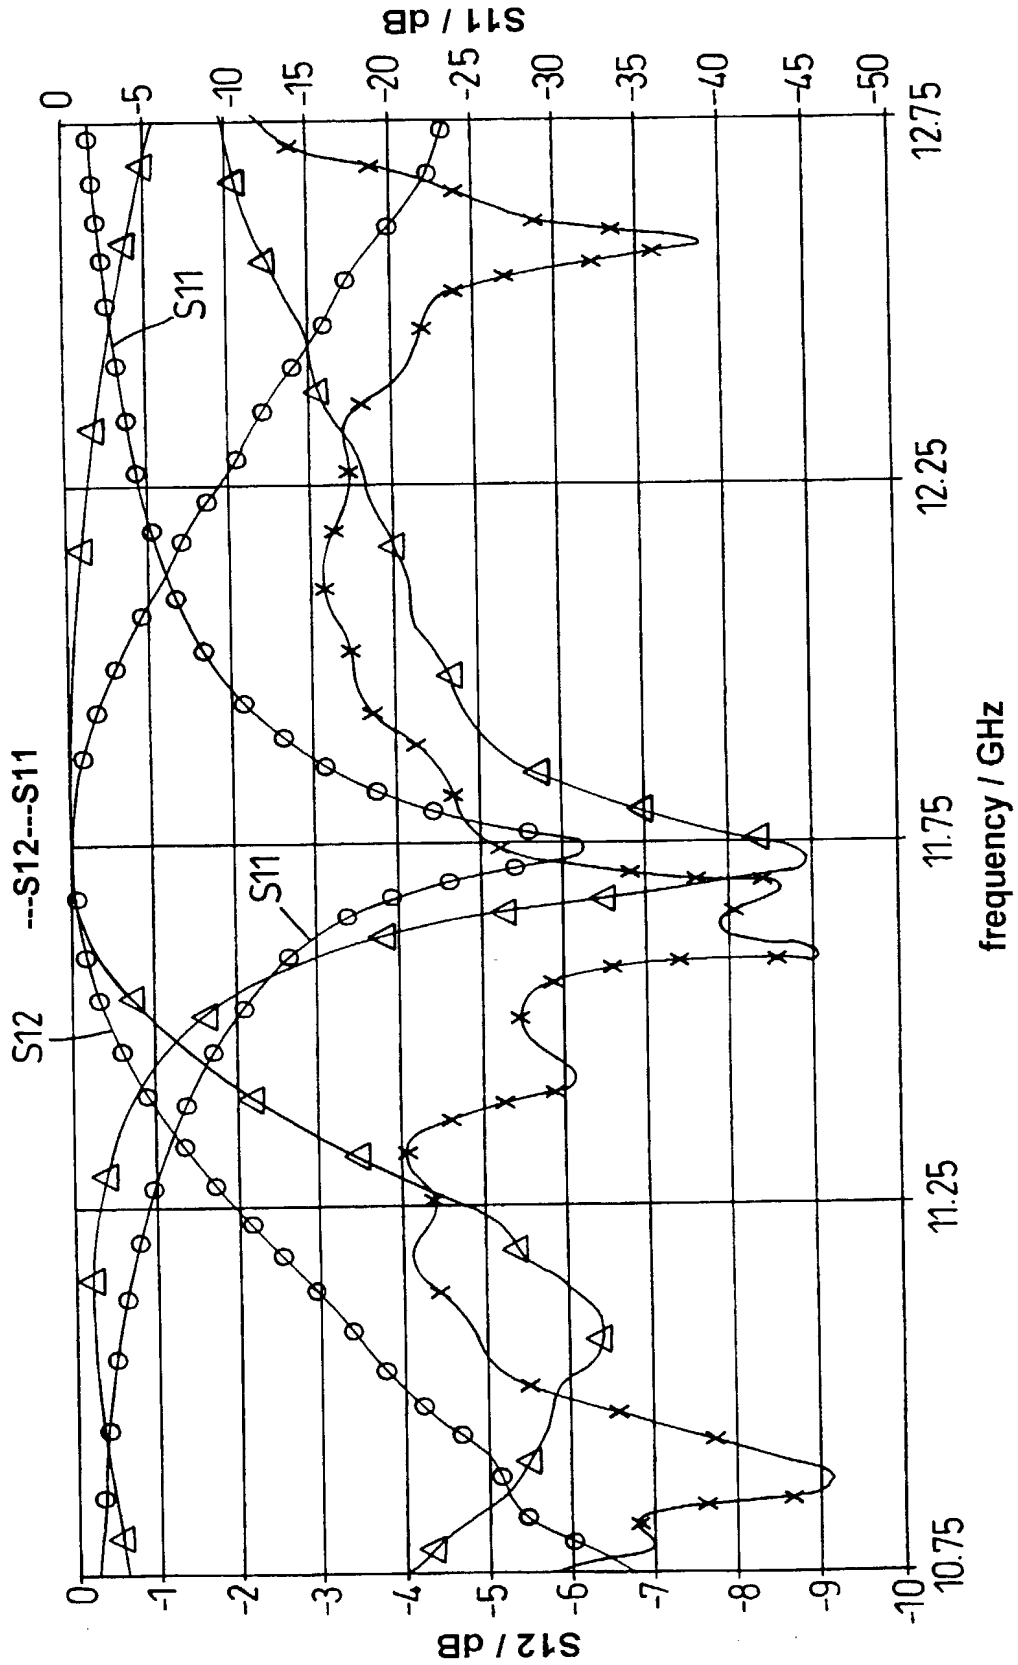


Fig. 11

8/11

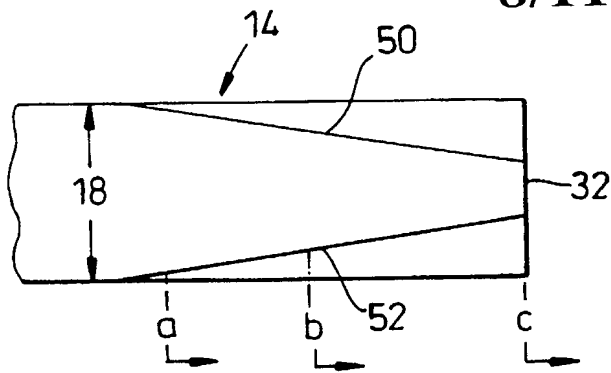


Fig. 14




Fig. 15a




Fig. 15b




Fig. 15c

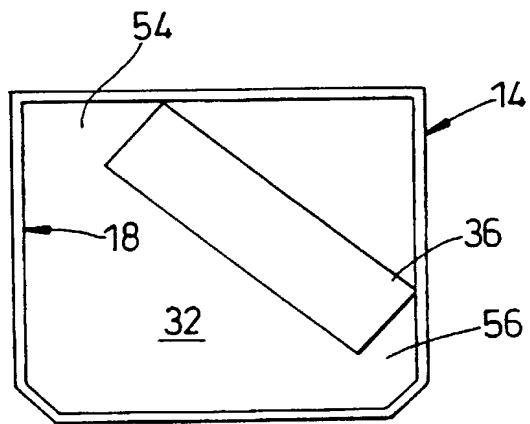


Fig. 16

9/11

PHASE OF WEDGEPLATE


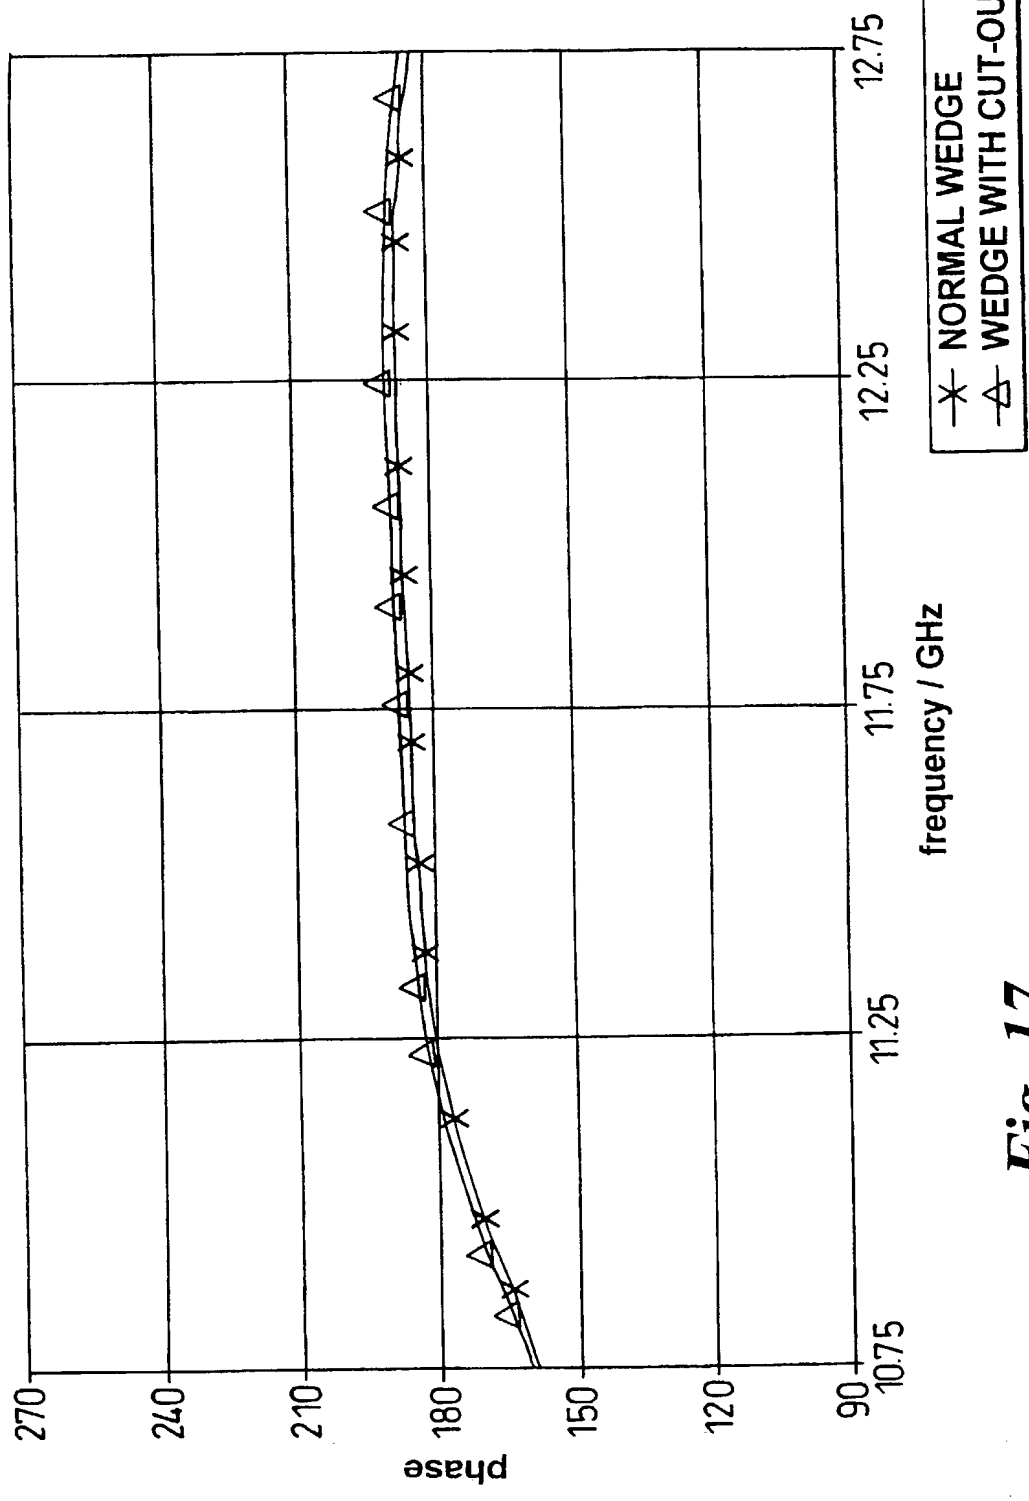


Fig. 17

10/11

SIGNAL CONVERSION

---S12---S11

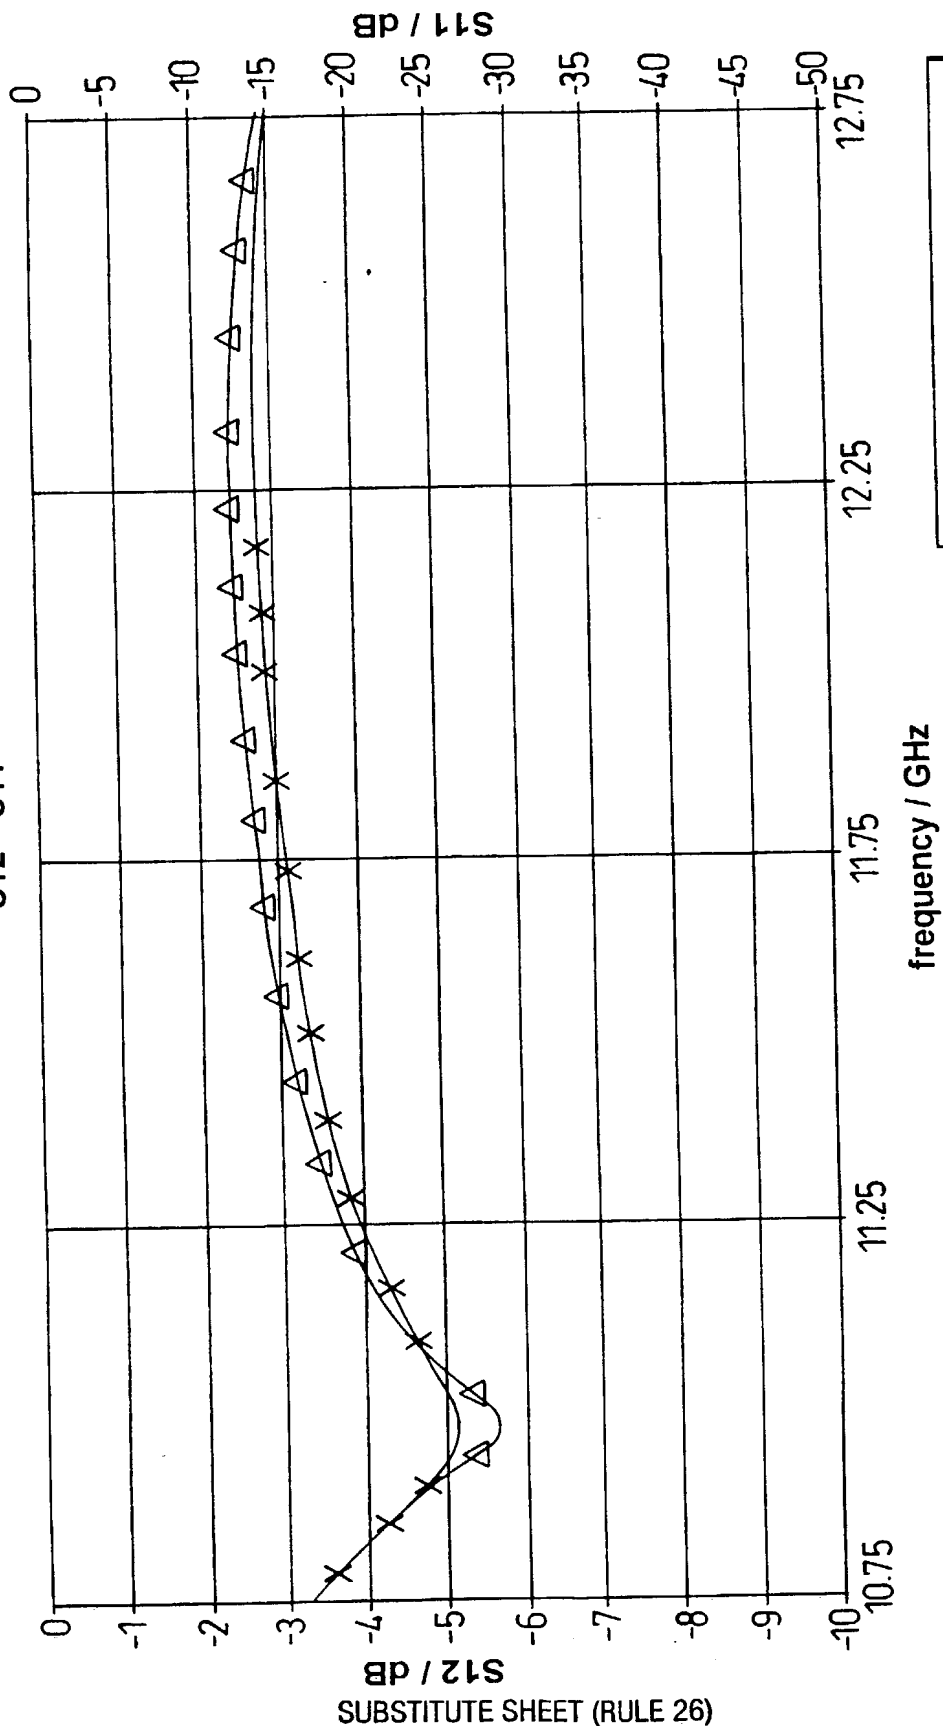

X NORMAL WEDGE
 Δ WEDGE WITH CUT-OUTS

Fig. 18

11/11

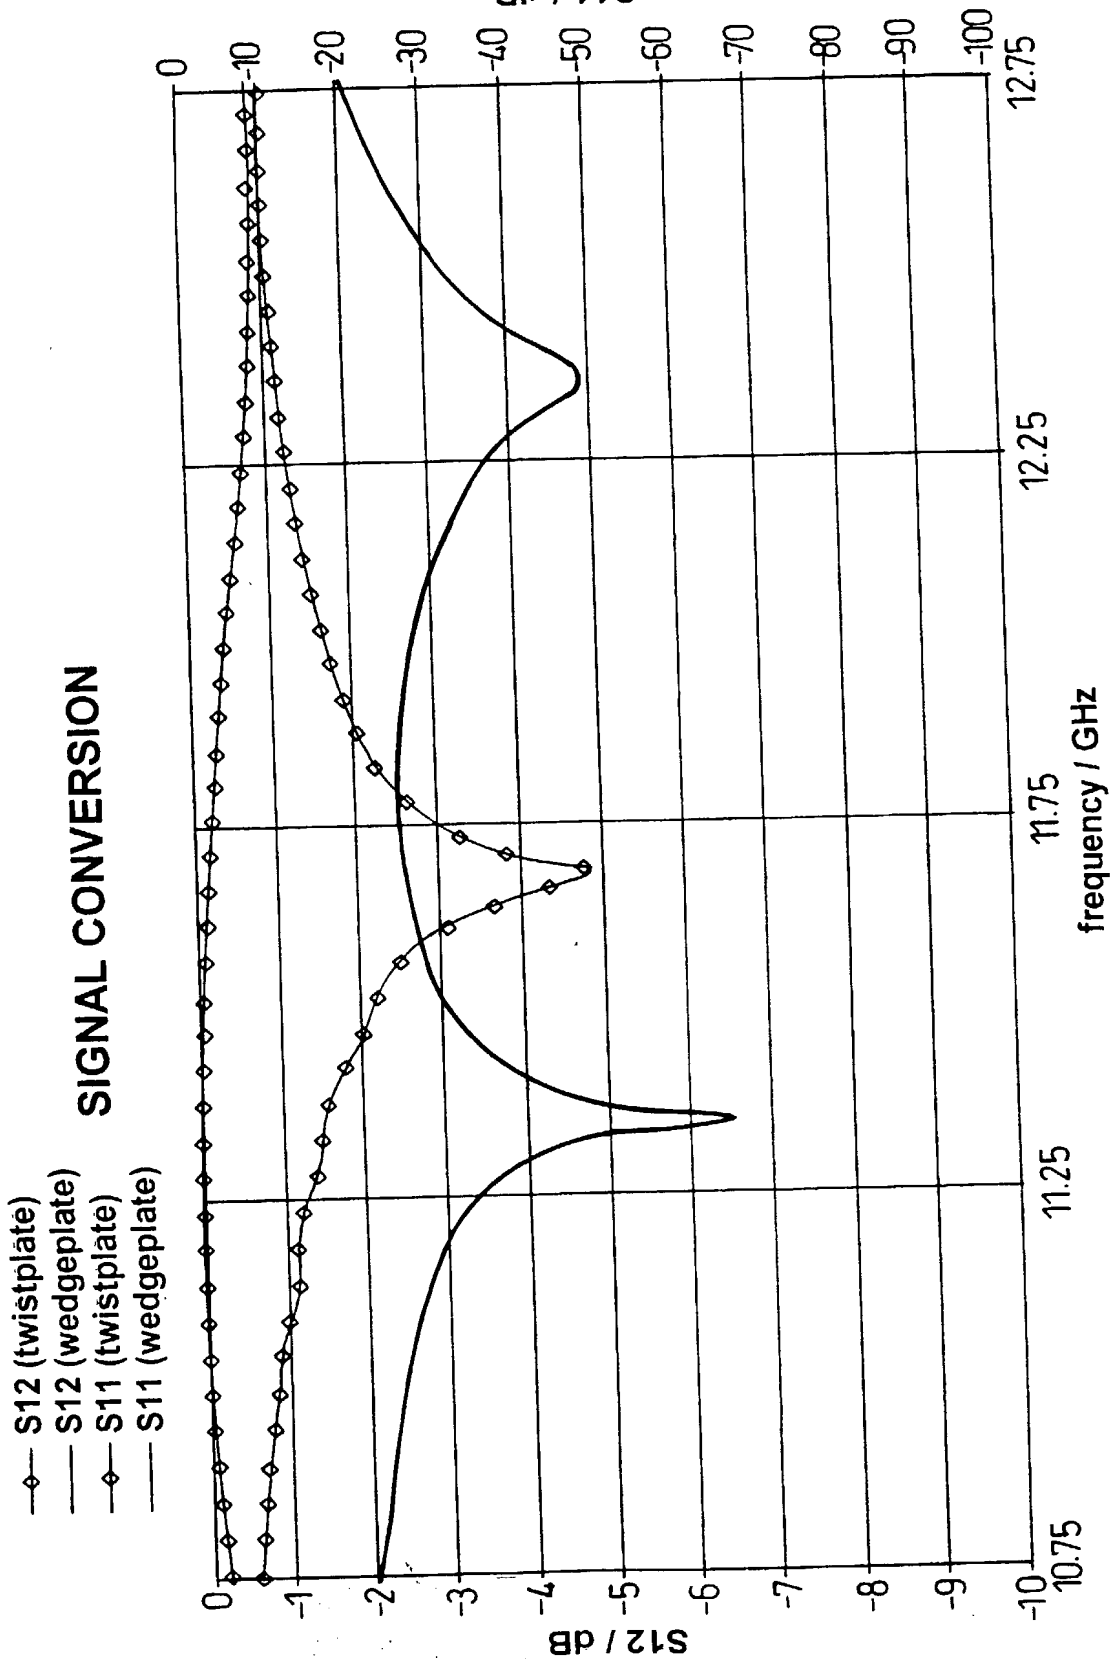


Fig. 19

FULL NAME AND RESIDENCE OF INVENTOR 2

LAST NAME: Stokes FIRST NAME: Jamie MIDDLE NAME:

CITY: Reading

STATE OR FOREIGN COUNTRY: United Kingdom

COUNTRY OF CITIZENSHIP: Great Britain

POST OFFICE ADDRESS: 134 Elm Park Road CITY: Reading

STATE OR COUNTRY: UK ZIP CODE: RG30 2TJ

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 1:  DATED: 19th FEB 2002
Andrew Patrick Baird

SIGNATURE OF INVENTOR 2:  DATED: 2nd MAR 2002
Jamie Stokes

**ALL FOREIGN APPLICATIONS, IF ANY, FILED PRIOR
TO THE APPLICATION(S) OF WHICH PRIORITY IS CLAIMED**

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>DATE OF FILING</u>
UK	PCT/GB00/01855	5/17/1999

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith: Gordon D. Coplein #19,165, Michael J. Sweedler #19,937, S. Peter Ludwig #25,351, Paul Fields #20,298, Marc S. Gross #19,614, Joseph B. Lerch #26,936, Melvin C. Garner #26,272, Ethan Horwitz #27,646, Adda C. Gogoris #29,714, Bert J. Lewen #19,407, Henry Sternberg #22,408, Peter C. Schechter #31,662, Robert Schaffer #31,194, Robert C. Sullivan, Jr. #30,499, Ira J. Levy #35,587, Joseph R. Robinson #33,448, Scott G. Lindvall #40,325, Paul F. Fehlner, Ph.D. #35,135, David Leason #36,195

all of the firm of DARBY & DARBY P.C., 805 Third Avenue, New York, NY 10022

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

DARBY & DARBY P.C.
805 Third Avenue
New York, NY 10022

Michael J. Sweedler

212-527-7700

FULL NAME AND RESIDENCE OF INVENTOR 1

LAST NAME: Baird FIRST NAME: Andrew MIDDLE NAME: Patrick

CITY: Bramley STATE OR FOREIGN COUNTRY: United Kingdom

COUNTRY OF CITIZENSHIP: Great Britain

POST OFFICE ADDRESS: 23 Strawberry Field CITY: Hampshire

STATE OR COUNTRY: UK ZIP CODE: RG26 2QF

Customer No.:



07278

PATENT TRADEMARK OFFICE

Docket No.: 3981/OK014

**DECLARATION
AND POWER OF ATTORNEY
Original Application**

As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below, of the invention entitled:

WAVEGUIDE POLARIZATION ROTATOR

which is described and claimed in:

☐ the attached specification or ☒ the specification in application Serial No. 09/980,724, filed November 15, 2001

(for declaration not accompanying appl.)

that I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, that I acknowledge my duty to disclose information of which I am aware which is material to patentability in accordance with 37 CFR §1.56. I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I hereby claim the priority benefits under 35 U.S.C. §119 of any application(s) for patent or inventor's certificate listed below. All foreign applications for patent or inventor's certificate on this invention filed by me or my legal representatives or assigns prior to the application(s) of which priority is claimed are also identified below.


PRIOR APPLICATION(S), IF ANY, OF WHICH PRIORITY IS CLAIMED

COUNTRYAPPLICATION NO.DATE OF FILING

Customer No.:



Docket No.: 3981/OK014



**DECLARATION
AND POWER OF ATTORNEY
Original Application**


As a below named inventor, I declare that the information given herein is true, that I believe that I am the original, first and sole inventor if only one name is listed at 1 below, or a joint inventor if plural inventors are named below, of the invention entitled:

WAVEGUIDE POLARIZATION ROTATOR

which is described and claimed in:

- ☐ the attached specification or ☒ the specification in application Serial No. 09/980,724, filed November 15, 2001, which is the U.S. national phase under 35 U.S.C. § 371 of International Application No. PCT/GB00/01855 filed May 17, 2000
(for declaration not accompanying appl.)

that I do not know and do not believe that the same was ever known or used in the United States of America before my or our invention thereof or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, that I acknowledge my duty to disclose information of which I am aware which is material to patentability in accordance with 37 CFR §1.56. I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I hereby claim the priority benefits under 35 U.S.C. §119 of any application(s) for patent or inventor's certificate listed below. All foreign applications for patent or inventor's certificate on this invention filed by me or my legal representatives or assigns prior to the application(s) of which priority is claimed are also identified below.



09950724 052902

PRIOR APPLICATION(S), IF ANY, OF WHICH PRIORITY IS CLAIMED

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>DATE OF FILING</u>
United Kingdom	9911449.8	17 May 1999

**ALL FOREIGN APPLICATIONS, IF ANY, FILED PRIOR
TO THE APPLICATION(S) OF WHICH PRIORITY IS CLAIMED**

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>DATE OF FILING</u>
----------------	------------------------	-----------------------

POWER OF ATTORNEY:

19 As a named inventor, I hereby appoint the following attorney(s) and/or agents(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith: Gordon D. Coplein #19,165, Michael J. Sweedler #19,937, S. Peter Ludwig #25,351, Paul Fields #20,298, Marc S. Gross #19,614, Joseph B. Lerch #26,936, Melvin C. Garner #26,272, Ethan Horwitz #27,646, Adda C. Gogoris #29,714, Bert J. Lewen #19,407, Henry Sternberg #22,408, Peter C. Schechter #31,662, Robert Schaffer #31,194, Robert C. Sullivan, Jr. #30,499, Ira J. Levy #35,587, Joseph R. Robinson #33,448, Scott G. Lindvall #40,325, Paul F. Fehlner, Ph.D. #35,135, David Leason #36,195

all of the firm of DARBY & DARBY P.C., 805 Third Avenue, New York, NY 10022

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

DARBY & DARBY P.C.

Michael J. Sweedler

805 Third Avenue

New York, NY 10022

212-527-7700

100 **FULL NAME AND RESIDENCE OF INVENTOR 1**

LAST NAME: Baird FIRST NAME: Andrew MIDDLE NAME: Patrick


CITY: Bramley STATE OR FOREIGN COUNTRY: Hampshire, United Kingdom

COUNTRY OF CITIZENSHIP: Great Britain

POST OFFICE ADDRESS: 23 Strawberry Field CITY: Bramley STATE OR COUNTRY: Hampshire, United Kingdom

ZIP CODE: RG26 2QF

GBX



09980724.052902

20
FULL NAME AND RESIDENCE OF INVENTOR 2

LAST NAME: Stokes

FIRST NAME: Jamie

MIDDLE NAME:

CITY: Reading

STATE OR FOREIGN COUNTRY: Berkshire, United Kingdom

GBX

COUNTRY OF CITIZENSHIP: Great Britain

POST OFFICE ADDRESS: 134 Elm Park Road

CITY: Reading

STATE OR COUNTRY: Berkshire, United Kingdom

ZIP CODE: RG30 2TJ

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 1:

DATED: 1/MAY/2002

Andrew Patrick Baird

SIGNATURE OF INVENTOR 2:

DATED: 27/4/02

Jamie Stokes